
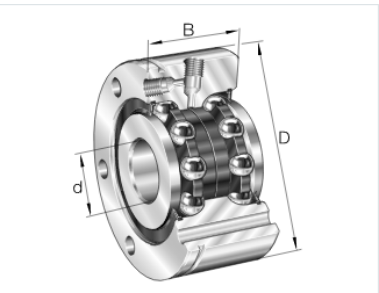


Screw support bearing

Bolt installation zklr-ZKLR1547-2RS

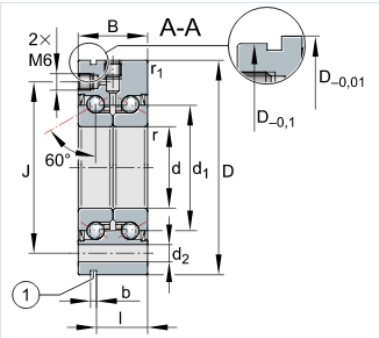

Recommended in a lock nut, to be ordered separately3) :

model :	ZKLR1547-2RS
Friction NM :	0.14
Locking NM :	15
Mass m ≈ kg :	0/-0.007

Dimension mm :

d :	47
tolerance :	51
A :	38.45
A :	22
D -0.01 :	18
B -0.25 :	0.3
d :	6.6
r min :	-
d :	39
b :	35
m :	-
n :	24
M :	17.5
H -0.5 :	29
d :	35
D :	M6
d :	4

Fixing bolt DIN9121) :

Specifications :	16700
quantity :	10700

Basic rated load Radial :

Dynamic load n :	16400
Static load n :	22400

Basic rated load Axial :

Dynamic load n :	3400
------------------	------

Static load n :	0.2
Limit speed nG grease min – 1 :	200
model :	0.0178
Stiffness Axial6) C al n/ μ m :	7
Mass moment of inertia2) mm kg $\cdot$ cm 2 :	ZM15
Axial runout7) μ m :	10

: