
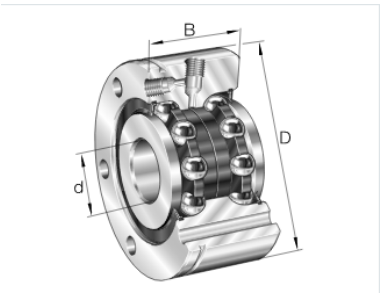


Screw support bearing

Bolt installation zklr-**ZKLR2060-2RS**

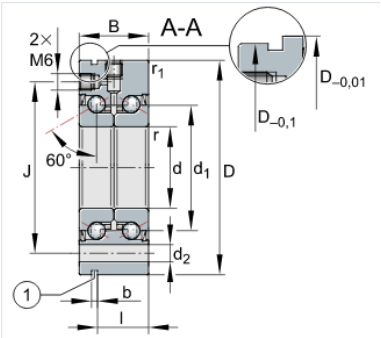

Recommended in a lock nut, to be ordered separately3) :

model :	ZKLR2060-2RS
Friction NM :	0.3
Locking NM :	20
Mass m ≈ kg :	0/-0.008

Dimension mm :

d :	60
tolerance :	60
A :	50.45
A :	28
D -0.01 :	24.4
B -0.25 :	0.3
d :	6.6
r min :	-
d :	47
b :	47
m :	-
n :	30
M :	24
H -0.5 :	39
d :	47
D :	M6
d :	4

Fixing bolt DIN9121) :

Specifications :	28000
quantity :	19100

Basic rated load Radial :

Dynamic load n :	27500
Static load n :	40000

Basic rated load Axial :

Dynamic load n :	2800
------------------	------

Static load n :	0.3
Limit speed nG grease min – 1 :	250
model :	0.263
Stiffness Axial6) C al n/ μ m :	8
Mass moment of inertia2) mm kg · cm 2 :	ZM20
Axial runout7) μ m :	18

: